

INSTRUCTIONS

2800 and 2810 Mechanical Combination Lock

Special Notes

Before installing the Mechanical Combination Lock, familiarise yourself with the operation and functions.

Unless manufactured to special order:-

The default User Code is 2244.

This code is common to all standard locks and it is very important that you set your own personal User Code. Your lock is not secure until you have changed the default User Code.

Keep a safe record of your User Code.

Euro-Locks SA NV (Belgium)

E: sales@euro-locks.be

T: +32 61 212.261

Euro-Locks SA (France)

E: euro-locks@euro-locks.fr

T: +33 (0)3.87.92.61.11

Euro-Locks Sicherheitseinrichtungen GmbH (Germany)

E: vertrieb@euro-locks.de

T: +49 (0) 6897 9072 0

Euro-Locks Sp. z o. o. (Poland)

E: sekretariat@euro-locks.pl

T: +48 (32) 344-78-70, -82, -84



A Lowe & Fletcher Group Company

INSTALLATION INSTRUCTIONS

2800 and 2810 Mechanical Combination Lock

Installation Guide

The 2800 and 2810 lock are supplied with a locking nut, cam, cam washer & cam fixing screw (M4).

Step 1 Remove all packaging.

Step 2 Position the lock on the outside of the door as shown in DIAGRAM 1.

Step 3 Holding the lock in position, fit the locking nut and tighten to 5Nm to secure as shown in DIAGRAM 2.

Step 4 Position the cam onto the rear of the lock as required, fit the cam washer and fixing screw as shown in DIAGRAM 3.

Step 5 Tighten the cam fixing screw using a No.2 Pozidriv to 1.5Nm. Take care not to damage the screw thread when fitting the screw.

Step 6 Before closing the door, test the lock by selecting the correct User Code and rotating 90°.

Step 7 Your lock should be ready to use.

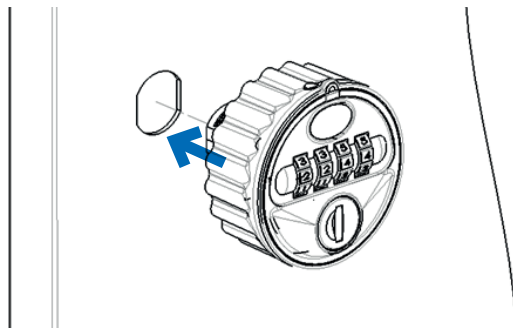


DIAGRAM 1.

Position 2800/2810 through door panel as shown.

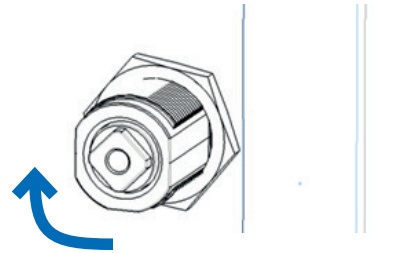


DIAGRAM 2.

Fit locking nut & tighten to secure.

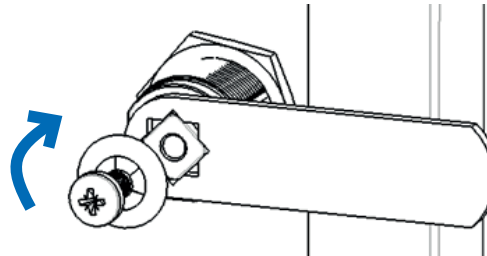


DIAGRAM 3.

Fit cam, washer & screw. Tighten with No.2 Pozidriv®

NOTE:

User mode MUST be specified on order. Lock cannot be changed between Public and Private Mode.

PUBLIC MODE USER INSTRUCTIONS

WITH THE LOCK IN THE "OPEN" POSITION,
ROTATE WHEELS TO SELECT A NEW USER CODE
(DIAGRAM 4)

TURN THE HANDLE TO THE "CLOSED" POSITION
(DIAGRAM 5)

SCRAMBLE CODE TO SECURE &
CHECK TO ENSURE LOCKED




DIAGRAM 4

DIAGRAM 5

PRIVATE MODE USER INSTRUCTIONS

SET A NEW USER CODE

SELECT CURRENT USER CODE (DEFAULT 2 2 4 4)

TURN HANDLE TO ACTIVATE CODE CHANGE BUTTON
(SEE DIAGRAM 6)

PRESS & HOLD CODE CHANGE BUTTON THEN ROTATE
INDIVIDUAL WHEELS TO SELECT NEW USER CODE
(SEE DIAGRAM 7)

RELEASE CODE CHANGE BUTTON TO SET USER CODE

CLOSE DOOR, LOCK & SCRAMBLE CODE




DIAGRAM 6

DIAGRAM 7

OPEN SELECT USER CODE & TURN HANDLE
CLOSE TURN HANDLE & SCRAMBLE CODE

EMERGENCY KEY OVERRIDE & CODE FINDER FUNCTION

INSERT MASTER KEY OVERRIDE & TURN 90°
CLOCKWISE (SEE DIAGRAM 8)

LIGHTLY ROTATE INDIVIDUAL WHEELS (UPWARDS)
UNTIL EACH ONE LOCKS INTO POSITION
(USER CODE IDENTIFIED)

TURN KEY 90° ANTI-CLOCKWISE
& REMOVE FROM LOCK
(SEE DIAGRAM 9)

REFER TO USER INSTRUCTIONS FOR PROCEDURE
TO SET NEW USER CODE




DIAGRAM 8

DIAGRAM 9