




## NEW PRODUCT BULLETIN

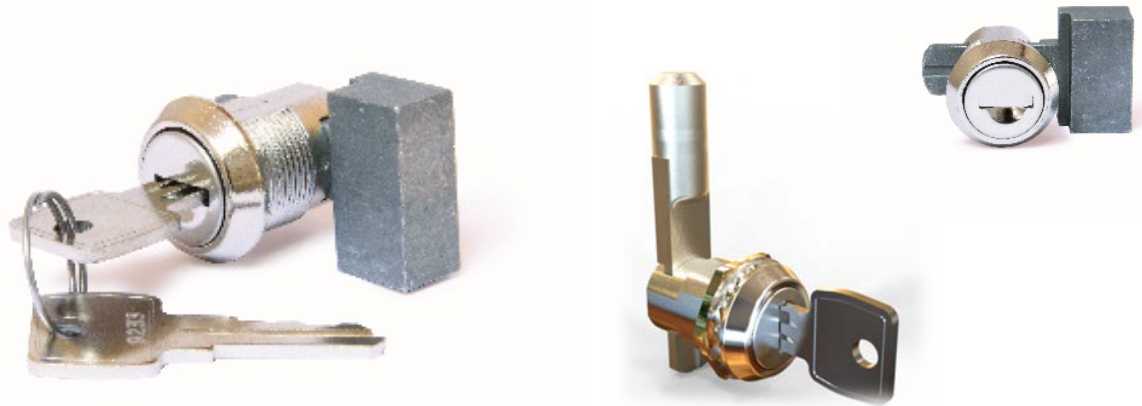


A new range of simple, strong, reliable and easy-to-install locks.

**PIL<sub>9</sub>** product range has been developed to match the professional refrigeration market requirements as well as other similar ones.

This product range is 100% compatible with existing solutions and provides cutting-edge features like notably:

### Main Features:

- ♥ Oriented slot to ensure correct positioning of the pillar and barrel
- ♥ Dust cover and hood in stainless steel
- ♥ Cylinder removable by service key (optional)
- ♥ Diameter 19,1 x 16,6mm fixing hole size
- ♥ Cylindrical, flat or customizable pillar
- ♥ Standard or specific combinations (E233, E324 ...)

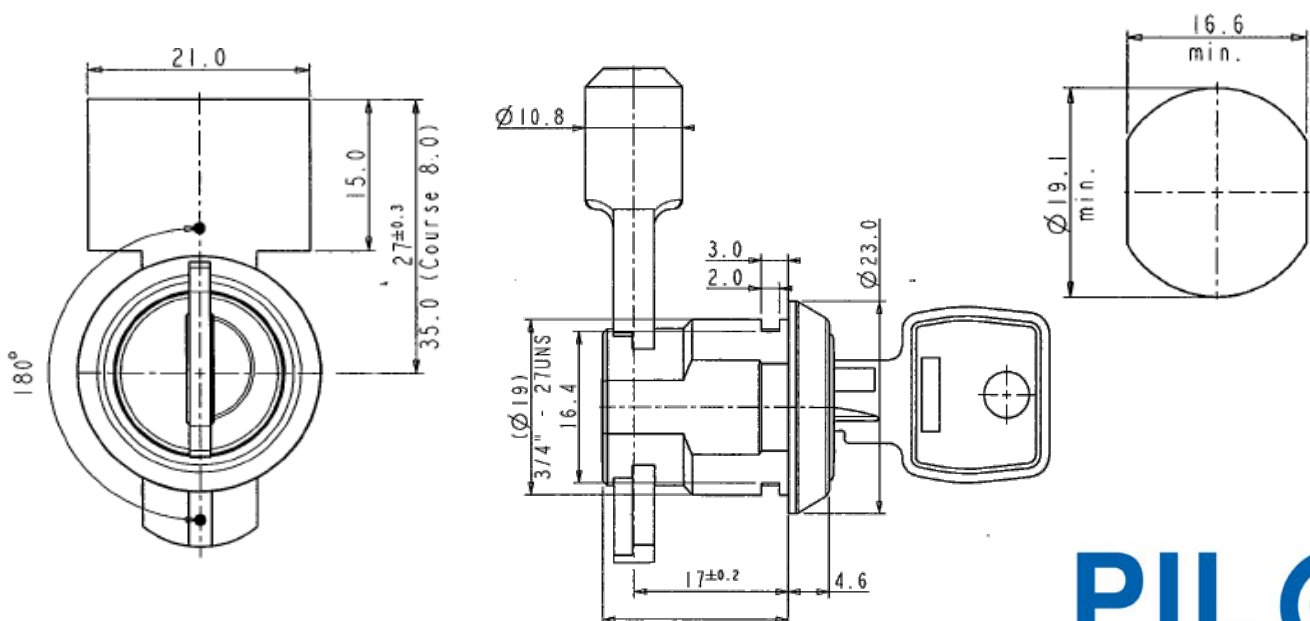

# NEW PRODUCT BULLETIN

<b>PIL9</b>	<b>Lock with numerous combinations or specific combinations</b>	
	<b>Body Lengths</b>	
	21	20,5MM
	24	24,5MM
	38	38,5MM
	<b>Piercing</b>	
	K	16,6 x diameter 19,1mm
	<b>Shutter</b>	
	S	Stainless Steel Shutter
	<b>Pillar Shape</b>	
	P0	Round pillar (diameter 10,8mm x 15,4mm)
	P1	Flat pillar (15 x 21 x 4,5mm)
	P2	Flat pillar (13 x 25 x 10,4mm)
	P3	Round pillar (diameter 10,8mm x 4,2mm)
	P4	Round pillar (diameter 10,8mm x 6,9mm)
	P5	Flat Pillar without head (10,8 x 10,8 x 4,5mm)
	<b>Key Rotation</b>	
	72	165° Clockwise – 1 key exit at 12 O/C <small>(*available on 20,5mm length)</small>
	03	180° Clockwise – 2 key exit at 12 & 6 O/C
	<b>Finish</b>	
	7B	Body in Bright Nickel - head in natural stainless steel
	<b>Lock Fixing</b>	
	N	Nut Fixing
	H	Horseshoe clip (please specify panel thickness)
	<b>Master</b>	
		No masterkey system
		Masterkey system



## EXAMPLE



PIL9	24	K	S	P0	03	7B	N	0
------	----	---	---	----	----	----	---	---

Pillar Lock – 24mm body length- fixing hole size diameter 19,1 x 16,6mm – with stainless steel shutter - Round Pillar - 180° Movement Clockwise 2 key exits – nickel finish – Nut fixing - Without Master. To be specified: Key alike or key to differ